

Under-approximation of the Greatest Fixpoint in Real-Time System Verification^{*}

Farn Wang

Dept. of Electrical Engineering, National Taiwan University
1, Sec. 4, Roosevelt Rd., Taipei, Taiwan 106, ROC;
+886-2-23635251 ext. 435; FAX:+886-2-23671909;
farn@cc.ee.ntu.edu.tw; <http://cc.ee.ntu.edu.tw/~farn>

Model-checker/simulator **RED** 5.4 and benchmarks are available at
<http://cc.ee.ntu.edu.tw/~val>

Abstract. Techniques for the efficient successive under-approximation of the greatest fixpoint in TCTL formulas can be useful in fast refutation of inevitability properties and vacuity checking. We first give an integrated algorithmic framework for both under and over-approximate model-checking. We design the *NZF (Non-Zeno Fairness) predicate*, with a greatest fixpoint formulation, as a unified framework for the evaluation of formulas like $\exists \Box \eta_1$, $\exists \Box \Diamond \eta_1$, and $\exists \Diamond \Box \eta_1$. We then prove the correctness of a new formulation for the characterization of the NZF predicate based on zone search and the least fixpoint evaluation. The new formulation then leads to the design of an evaluation algorithm, with the capability of successive under-approximation, for $\exists \Box \eta_1$, $\exists \Box \Diamond \eta_1$, and $\exists \Diamond \Box \eta_1$. We then present techniques to efficiently search for the zones and to speed up the under-approximate evaluation of those three formulas. Our experiments show that the techniques have significantly enhanced the verification performance against several benchmarks over exact model-checking.

Keywords: real-time, model-checking, verification, fairness, under-approximation, greatest fixpoint, inevitability, vacuity

1 Introduction

The greatest fixpoint evaluation is useful in the verification of *inevitability properties* and *fairness assumptions* of real-time systems [19,21]. In the before, people have researched on *over-approximation* techniques [12,21], that construct the characterization for a superset of the greatest fixpoint. But in practice, *under-approximation* techniques, that construct a subset of the greatest fixpoint, can also be useful. For example, we may want to verify a *TCTL (Timed Computation*

^{*} The work is partially supported by NSC, Taiwan, ROC under grants NSC 92-2213-E-002-103, NSC 92-2213-E-002-104, and by the System Verification Technology Project of Industrial Technology Research Institute, Taiwan, ROC (2004).

Tree Logic) [2] inevitability property like $\forall\Diamond\text{full}$ which says “Along all computations, our stomachs will eventually be full of nice food.” In model-checking, we actually try to prove the falsehood of its negation, or equivalently the emptiness of the state space characterized by $\exists\Box\neg\text{full}$. The evaluation procedure for the greatest fixpoints in TCTL in exact analysis is quite expensive [21]. In real-world system development, it is seldom the case that no design bug ever happens. On the contrary, it is quite possible that a long debugging process is needed in the early design stages. Thus not only we need techniques to prove correct inevitabilities, but also we are in need of techniques to fast refute incorrect inevitabilities. Efficient under-approximation techniques can serve to this purpose by quickly constructing a few *counter-examples* to the incorrect inevitabilities to make fast refutation.

Under-approximation techniques for the greatest fixpoint evaluation can also be useful in the *vacuity checking* [4, 9] of system assumptions. For example, we may want to specify that “Whenever we are hungry, along all computations, eventually we will be full.” In TCTL, this is $\forall\Box(\text{hungry} \rightarrow \forall\Diamond\text{full})$. But this property can be satisfied by a system model that either does not generate any computation or never gets into a **hungry** state. In the end, it is still the responsibility of the verification engineers to check if a specification is vacuously satisfied because of the wrong modeling of the environment or the component interactions. Under-approximation can help in this case by quickly constructing a few example computations, if any, along which eventually **hungry** is true.

Similarly, vacuous satisfaction can happen in the verification of properties with fairness assumptions. For example, we may specify that “If we are full infinitely many times, then we eventually will not feel hungry.” Again, the property can be vacuously satisfied in a system that fills us only finitely many times. Before evaluating the specification, we may first want to use under-approximation techniques to make sure that in the model, there are computations with infinitely many **full** states.

In this work, we present techniques for the under-approximation of the greatest fixpoint evaluation in real-time systems with fairness assumptions. We propose a predicate called *NZF* (*Non-Zeno Fairness*) as a unified framework for the evaluation of the greatest fixpoints for formulas like $\exists\Box\phi$, $\exists\Box\Diamond\phi^1$, and $\exists\Diamond\Box\phi^2$ in a TCTL extension with the fairness concepts. In notations, the predicate is $NZF(\eta_0, \eta_1, \eta_2)$. A state ν_0 satisfies $NZF(\eta_0, \eta_1, \eta_2)$ iff ν_0 starts a run along which η_0 is always true, η_1 is eventually always true, and η_2 is true infinitely often. The evaluation of $NZF(\eta_0, \eta_1, \eta_2)$ consists of all states that go (through a path first satisfying η_0 and then satisfying η_1) to some fair computation cycles such that the execution time along each cycle is no less than 1, $\eta_0 \wedge \eta_1$ is always true along the cycles, and η_2 is true at least once along each cycle. For convenience, we call such a cycle an (η_1, η_2) -NZF-cycle. A picture showing the states, run seg-

¹ This means that there is an infinite computation along which ϕ is true infinitely many times.

² This means that there is an infinite computation along which ϕ eventually becomes true forever.

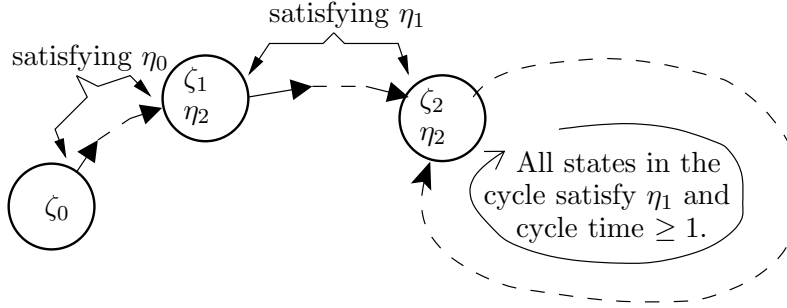


Fig. 1. The run segments for $NZF(\eta_0, \eta_1, \eta_2)$

ments, and cycles in the evaluation of an $NZF(\eta_0, \eta_1, \eta_2)$ predicate is in figure 1. According to [21], the evaluation of $NZF()$ needs a greatest fixpoint evaluation loop nesting a least fixpoint evaluation loop and is quite expensive.

Given two set η_1, η_2 of states, let $\text{rch_bck}(\eta_1, \eta_2)$ be the predicate characterizing those states backwardly reachable from η_2 through paths of states in η_1 . In the literature, $\text{rch_bck}()$ is evaluated as a least-fixpoint. (Details in section 5.) In this work, we propose the following new formulation for its evaluation:

$$NZF(\eta_0, \eta_1, \eta_2) \equiv \bigvee_{\zeta \text{ is a set of states in an } (\eta_1, \eta_2)\text{-NZF-cycle.}} \text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \zeta))$$

The formulation is based on the enumeration of state sets in NZF-cycles and only two least fixpoint evaluations for each state set in the enumeration. There are two advantages to this formulation.

- It allows for successive under-approximation. After any iteration, if the verification engineers see that either enough precision has been reached or too much computation resources have been consumed, she/he can terminate the enumeration.
- It may seem that the policy of the NZF zone enumeration can greatly affect the efficiency to approach the fixpoint solution. In reality, our experiment data shows that the performance of this formulation can be very insensitive to the enumeration policy. As long as the NZF states fall in the backward reachability of a zone, it will be included in under-approximation. In a well-designed system, usually it is the case that most of the states are reachable from one another. In particular, we have established lemma 6 to show that in each iteration of the under-approximation, states in an NZ-cycle either all will be included in the under-approximation or none will.

Since our new formulation can be insensitive to the policy of NZF-cycle state set enumeration, it is better to first enumerate those NZF-cycle state sets that can be efficiently constructed. We have developed two techniques for quick construction of the NZF-cycle state sets. Our experiment shows that our implementation can lead up to 1000^+ times speed-up against some of the benchmarks. Moreover, in most cases, we succeeded in refuting the inevitabilities or proving vacuities after enumerating only one or two state sets.

Section 2 discusses related work. Section 3 reviews the mathematical models of our system behaviors. Section 4 extends TCTL [2] to $TCTL^\infty$ to allow for the specification of fairness properties. Section 5 gives the background knowledge for reading this article. Then section 6 presents an algorithmic framework for both over-approximate and under-approximate model-checking of $TCTL^\infty$ properties. Section 7 explains why the old formulation for NZF evaluation [21] is expensive. Section 8 presents our successive under-approximation algorithm, including the new theoretical formulation of the NZF evaluation and two techniques to construct characterizations of those states in the NZF-cycles. Section 9 reports a speed-up technique, for our under-approximation algorithm, that does not sacrifice the precision of the greatest fixpoint evaluation. Section 10 reports our implementation and experiments. The experiment data shows significant enhancement over the exact analysis against several benchmarks.

2 Related work

The model of *timed automata (TA)* was by Alur and Dill [3]. TCTL and its model-checking algorithm was by Alur, Cocubetis, and Dill [2]. Symbolic model-checking algorithm based on zones was by Henzinger et al [8].

Wong-Toi presented a general framework for the approximate verification of TAs [22]. Especially, the convex-hull over-approximation has been shown a very powerful technique in many following workpieces.

Moller applied over-approximation techniques to analyze restricted TCTL inevitability properties without modal-formula nesting [12]. The idea was to make model augmentations to speed up the verification performance.

Wang and et al discussed how to speed up the greatest fixpoint evaluation in TCTL [21]. Other than the over-approximation, they also presented a speed-up technique called *EDGF (Early Decision on Greatest Fixpoint)* which yields exact analysis results. The idea is that inevitability analysis usually takes the form of $\forall \Box(p \rightarrow \forall \Diamond q)$, which after negation for model-checking, becomes the reachability of $p \wedge \exists \Box \neg q$. While evaluating the greatest fixpoint of $\exists \Box \neg q$, the image of the greatest fixpoint monotonically shrinks in successive iterations. Thus when we find the intersection between p and the image is empty at a particular iteration, we can terminate the fixpoint evaluation rightaway. Note that EDGF speeds up the verification only when an inevitability is correct. When an inevitability is incorrect, it shows no performance enhancement.

Wang extended TCTL with the capability of punctual event specifications and multiple strong and weak fairness assumptions [19]. The evaluation algorithm of those fairness assumptions was based on the greatest fixpoint evaluation.

3 Timed automatas

We use the widely accepted model of *timed automata (TA)* [3] to describe the transitions in dense-time state-spaces. A TA is a finite-state automata equipped

with a finite set of clocks which can hold nonnegative real-values. At any moment, the TA can stay in only one *mode* (or *control location*). Each mode is labeled with an invariance condition on clocks. At any instant, at most one transition can be fired if its triggering condition is satisfied. Upon the firing, the automata instantaneously transits from one mode to another and resets some clocks to zero. In between transitions, all clocks increase their readings at a uniform rate.

For convenience, given a set P of atomic propositions and a set X of clocks, we use $B(P, X)$ as the set of all Boolean combinations of atoms of the forms p and $x \sim c$ where $p \in P$, $x \in X \cup \{0\}$, “ $\sim$ ” is one of $\leq, <, =, >, \geq$, and c is an integer constant.

Definition 1. timed automata (TA) A TA A is given as a tuple $\langle X, Q, I, \mu, E, \gamma, \tau, \pi \rangle$ with the following restrictions. X is a finite set of clocks. Q is a finite set of modes. $I \in B(Q, X)$ is the initial condition. $\mu : Q \mapsto B(\emptyset, X)$ defines the conjunctive invariance condition of each mode. E is the finite set of transitions. $\gamma : E \mapsto (Q \times Q)$ defines the source and the destination modes of each transition. $\tau : E \mapsto B(\emptyset, X)$ and $\pi : E \mapsto 2^X$ respectively defines the conjunctive triggering condition and the clock set to reset of each transition. ■

Definition 2. states A state ν of TA $A = \langle X, Q, I, \mu, E, \gamma, \tau, \pi \rangle$ is a valuation from $Q \cup X$ such that for all $q \in Q$, $\nu(q) \in \{\text{false}, \text{true}\}$ and for all $x \in X$, $\nu(x) \in \mathcal{R}^+$, the set of nonnegative real numbers. The restriction is that there is at most one $q \in Q$ such that $\nu(q)$ is *true*. ■

Definition 3. Satisfaction of state predicates We say a state ν satisfies a state predicate $\eta \in B(P, X)$, where P is either $\emptyset$ or Q , iff the following inductive conditions are satisfied.

- $\nu \models q$ iff $\nu(q)$;
- $\nu \models x \sim c$ iff $\nu(x) \sim c$;
- $\nu \models \eta_1 \vee \eta_2$ iff $(q, \nu) \models \eta_1$ or $(q, \nu) \models \eta_2$;
- $\nu \models \neg \eta_1$ iff it is not the case that $\nu \models \eta_1$. ■

For any $\delta \in \mathcal{R}^+$, $\nu + \delta$ is a new state identical to ν except that for every $x \in X$, $\nu(x) + \delta = (\nu + \delta)(x)$. Given $\bar{X} \subseteq X$, $\nu\bar{X}$ is a new state identical to ν except that for every $x \in \bar{X}$, $\nu\bar{X}(x) = 0$. Given $q \in Q$, νq is identical to ν except that $\nu q(q) = \text{true}$.

Definition 4. runs Given a TA $A = \langle X, Q, I, \mu, E, \gamma, \tau, \pi \rangle$, a *run* is an infinite computation of A along which time diverges. Formally speaking, a run is an infinite sequence of state-time pairs $(\nu_0, t_0)(\nu_1, t_1) \dots (\nu_k, t_k) \dots$ such that

- $t_0 t_1 \dots t_k \dots$ is a monotonically increasing divergent real-number sequence, i.e., $\forall c \in \mathcal{N}, \exists h > 1, t_h > c$; and
- **Invariance condition:** for all $k \geq 0$, $\delta \in [0, t_{k+1} - t_k]$, and $q \in Q$, $\nu_k + \delta \models \mu(q)$ iff $\nu_k \models \mu(q)$; and
- **Transitions:** for all $k \geq 0$, either
 - a **null transition happens**, i.e., $\nu_k + (t_{k+1} - t_k) = \nu_{k+1}$; or
 - a **discrete transition e happens**, denoted $q_k \xrightarrow{e} q_{k+1}$ for some $e \in E$ such that $\gamma(e) = (q_k, q_{k+1}) \wedge \nu_k \models \mu(q_k) \wedge \nu_{k+1} \models \mu(q_{k+1})$. The constraint is that $\nu_k + t_{k+1} - t_k \models \tau(e)$, and $(\nu_k + t_{k+1} - t_k)\pi(e)q_{k+1} = \nu_{k+1}$. ■

4 $TCTL^\infty$

$TCTL^\infty$ is an extension of TCTL [2] and has the following syntax rules.

$$\phi ::= q \mid x \sim c \mid \phi_1 \vee \phi_2 \mid \neg \phi_1 \mid x.\phi_1 \mid \exists \phi_1 \mathcal{U} \phi_2 \mid \exists \Box \phi_1 \mid \exists \Box \Diamond \phi_1 \mid \exists \Diamond \Box \phi_1$$

Here $q \in Q$, $x \in X$, $c \in \mathcal{N}$. ϕ_1 and ϕ_2 are $TCTL^\infty$ formulas. $x.\phi$ means that if there is a clock x with reading zero now, then ϕ is satisfied. $\exists \phi_1 \mathcal{U} \phi_2$ means that there exists a computation along which ϕ_1 is true until ϕ_2 happens. $\exists \Box \phi_1$ means that there is a computation along which ϕ_1 is true in every state. $\exists \Box \Diamond \phi_1$ means that there is a computation along which ϕ_1 is true infinitely often. $\exists \Diamond \Box \phi_1$ means that there is a computation along which ϕ_1 will be stable eventually. Sometimes, $\Box \Diamond$ is written as $\Diamond^\infty$ while $\Diamond \Box$ as $\Box^\infty$ in the literature. Also we adopt the following standard shorthands :

- $true$ for $0 = 0$
- $\phi_1 \wedge \phi_2$ for $\neg((\neg \phi_1) \vee (\neg \phi_2))$
- $\exists \Diamond \phi_1$ for $\exists true \mathcal{U} \phi_1$
- $\forall \phi_1 \mathcal{U} \phi_2$ for $\neg((\exists (\neg \phi_2) \mathcal{U} \neg(\phi_1 \vee \phi_2)) \vee (\exists \Box \neg \phi_2))$
- $\forall \Box \Diamond \phi_1$ for $\neg \exists \Diamond \Box \neg \phi_1$
- $false$ for $\neg true$
- $\phi_1 \rightarrow \phi_2$ for $(\neg \phi_1) \vee \phi_2$
- $\forall \Box \phi_1$ for $\neg \exists \Diamond \neg \phi_1$
- $\forall \Diamond \phi_1$ for $\forall true \mathcal{U} \phi_1$
- $\forall \Diamond \Box \phi_1$ for $\neg \exists \Box \Diamond \neg \phi_1$

Definition 5. (Satisfaction of $TCTL^\infty$ formulas): We write in notations $A, \nu_1 \models \phi$ to mean that $TCTL^\infty$ formula ϕ is satisfied at state ν_1 in TA A . The satisfaction relation is defined inductively as follows.

- When $\eta \in B(Q, X)$, $A, \nu_1 \models \eta$ iff $\nu_1 \models \eta$, which was previously defined in the beginning of section 3.
- $A, \nu_1 \models \phi_1 \vee \phi_2$ iff either $A, \nu_1 \models \phi_1$ or $A, \nu_1 \models \phi_2$.
- $A, \nu_1 \models \neg \phi_1$ iff $A, \nu_1 \not\models \phi_1$.
- $A, \nu_1 \models x.\phi$ iff $A, \nu_1\{x\} \models \phi$.
- $A, \nu_1 \models \exists \phi_1 \mathcal{U} \phi_2$ iff there exists a run $\rho = (\nu_1, t_1)(\nu_2, t_2) \dots$ and an $i \geq 1$ such that $A, \nu_i \models \phi_2$ and for every $0 \leq j < i$ and $\delta \in [0, t_{j+1} - t_j]$, $A, \nu_j + \delta \models \phi_1$.
- $A, \nu_1 \models \exists \Box \phi_1$ iff there exists a run $\rho = (\nu_1, t_1)(\nu_2, t_2) \dots$ such that for every $i \geq 1$ and $\delta \in [0, t_{i+1} - t_i]$, $A, \nu_i + \delta \models \phi_1$.
- $A, \nu_1 \models \exists \Box \Diamond \phi_1$ iff there exist a run $\rho = (\nu_1, t_1)(\nu_2, t_2) \dots$ and an infinite and divergent positive integer sequence $i_1 i_2 \dots i_k \dots$ such that for every $k \geq 1$, $A, \nu_{i_k} \models \phi_1$.
- $A, \nu_1 \models \exists \Diamond \Box \phi_1$ iff there exist a run $\rho = (\nu_1, t_1)(\nu_2, t_2) \dots$ and $k \geq 1$ such that for every $i \geq k$ and $\delta \in [0, t_{i+1} - t_i]$, $A, \nu_i + \delta \models \phi_1$.

A TA $A = \langle X, Q, I, \mu, E, \gamma, \tau, \pi \rangle$ satisfies a $TCTL^\infty$ formula ϕ , in symbols $A \models \phi$, iff for every state $\nu_0 \models I$, $A, \nu_0 \models \phi$. ■

5 Basic building blocks from the literature

For convenience, let $\mathcal{Z}$ be the set of integers. Given $c \geq 0$ and $c \in \mathcal{Z}$, let $\mathcal{I}_c$ be $\{\infty\} \cup \{d \mid d \in \mathcal{Z}; -c \leq d \leq c\}$. Also let $C_{A:\phi}$ be the biggest timing constant used in TA A and $TCTL^\infty$ formula ϕ .

Most modern model-checkers for timed systems are built around some symbolic manipulation procedures [8] of *zones* implemented in various data-structures

[1,5,6,10,11,14,15]. A zone is symbolically represented by a set of difference constraints between clock pairs. Formally, a zone is a conjunction of constraints like $x - x' \sim d$, with $x, x' \in X \cup \{0\}$, $\sim \in \{“\leq”, “<”\}$, and $d \in \mathcal{I}_{C_{A:\phi}}$, such that when $d = \infty$, $\sim$ must be “<”. For convenience, let $\mathcal{B}_c = \{(\sim, d) \mid \sim \in \{“\leq”, “<”\}; d \in \mathcal{I}_c; d = \infty \Rightarrow \sim = “<”\}$. With respect to given X and $C_{A:\phi}$, the set of all zones is finite. Alternatively, a zone can be defined as a mapping $(X \cup \{0\})^2 \mapsto \mathcal{B}_{C_{A:\phi}}$. We shall use the two equivalent notations flexibly.

We need two basic procedures, one for the computation of weakest preconditions of discrete transitions and the other for those of backward time-progressions. Details about the two procedures can be found in [8, 14–17, 20]. Given a state-space representation η (as a union of zones) and a discrete transition e , the first procedure, **xtion_bck**(η, e) with $\gamma(e) = (q, q')$, computes the weakest precondition

- in which every state satisfies the invariance condition $\mu(q)$; and
- from which we can transit to states in η through e .

η can be represented as a DBM set [6] or as a BDD-like data-structure [14, 16, 18]. Our algorithms are independent of the representation scheme of η . The second procedure, **time_bck**(η), computes the space representation of states

- from which we can go to states in η simply by time-passage; and
- every state in the time-passage also satisfies the invariance condition imposed by $\mu()$ for whatever modes the states are in.

We can go from zone η_1 to another zone η_2 in one time-progress step iff $\eta_1 \subseteq \mathbf{time_bck}(\eta_2)$ and in one discrete transition step iff $\exists e \in E(\eta_1 \subseteq \mathbf{xtion_bck}(\eta_2, e))$. A zone sequence $\eta_1 \eta_2 \dots \eta_k$ corresponds to a finite segment of computation iff for every $1 \leq i < k$, either $\eta_i \subseteq \mathbf{time_bck}(\eta_{i+1})$ or $\eta_i \subseteq \mathbf{xtion_bck}(\eta_{i+1})$.

With the two basic procedures, we can construct the symbolic backward reachability procedure, denoted **rch_bck**(η_1, η_2) for convenience, as in [8, 14–17, 20]. Intuitively, **rch_bck**(η_1, η_2) characterizes the state-space for $\exists \eta_1 \mathcal{U} \eta_2$. Computationally, **rch_bck**(η_1, η_2) can be defined as the least fixpoint of equation: $F = \eta_2 \vee (\eta_1 \wedge \mathbf{time_bck}(\eta_1 \wedge \bigvee_{e \in E} \mathbf{xtion_bck}(F, e)))$. That is, **rch_bck**(η_1, η_2) $\equiv \mathbf{lfp} F. (\eta_2 \vee (\eta_1 \wedge \mathbf{time_bck}(\eta_1 \wedge \bigvee_{e \in E} \mathbf{xtion_bck}(F, e))))$. The least fixpoint is computable because of the monotonicity of F in fixpoint equation $F = \Lambda(F)$ and the finite structure of a zone space.

To calculate the weakest precondition before a clock reset, we also need a partial implementation of the Fourier-Motzkin elimination [7]. We assume that we have such a procedure **FM_elim**($\eta, \{x\}$) which eliminates all information in state-predicate η related to x .

6 Abstract model-checking algorithm

The key component in our abstract model-checking algorithm is for the approximate construction of the symbolic representations of states that satisfy one of the following three types of properties: $\exists \Box \phi_1$, $\exists \Box \Diamond \phi_1$, and $\exists \Diamond \Box \phi_1$. We can now establish the following lemmas within the context of a given state ν of a TA A . Due to page-limit, the proofs are omitted.

Lemma 1. $A, \nu \models \exists \Box \psi_1$ iff $A, \nu \models \text{NZF}(\psi_1, \psi_1, \text{true})$. ■

Lemma 2. $A, \nu \models \exists \Box \Diamond \psi_1$ iff $A, \nu \models \text{NZF}(\text{true}, \text{true}, \psi_1)$. ■

Lemma 3. $A, \nu \models \exists \Diamond \Box \psi_1$ iff $A, \nu \models \text{NZF}(\text{true}, \psi_1, \text{true})$. ■

The three lemmas together show that the evaluation of $\text{NZF}(\eta_0, \eta_1, \eta_2)$ can be used as a unified scheme to evaluate these three types of the properties.

We are about to give a framework of abstract model-checking algorithm that is capable of doing both under and over-approximations. In general, over-approximation can be done in various ways [21, 22], e.g. the convex-hull approximation. In the following sections, we focus on how to do under-approximation of $\text{NZF}()$. For the time being, we assume that there is a procedure called $\text{NZF}(\eta_0, \eta_1, \eta_2, \text{flag}_A)$ capable of calculating the approximation of $\text{NZF}(\eta_0, \eta_1, \eta_2)$. Here, input flag flag_A is used to choose the approximation scheme. When flag_A is -1, it means under-approximation; 0, no approximation; and 1, over-approximation.

The following evaluation algorithm uses $\text{NZF}()$ and the procedures presented in the last section as basic blocks to evaluate $TCTL^\infty$ formulas.

```

eval( $A, \bar{\phi}, \text{flag}_A$ ) {
  switch ( $\bar{\phi}$ ) {
    case ( $false$ ):   return  $false$ ;
    case ( $q$ ):      return  $q$ ;
    case ( $x \sim c$ ): return  $x \sim c$ ;
    case ( $\phi_1 \vee \phi_2$ ): return  $\text{val}(A, \phi_1, \text{flag}_A) \vee \text{eval}(A, \phi_2, \text{flag}_A)$ ;
    case ( $\neg \phi_1$ ):  return  $\neg \text{eval}(A, \phi_1, -1 * \text{flag}_A)$ ;
    case ( $x.\phi_1$ ):   return  $\text{FM\_elim}(x = 0 \wedge \text{eval}(A, \phi_1, \text{flag}_A), \{x\})$ ;
    case ( $\exists \phi_1 \mathcal{U} \phi_2$ ):  $Y_1 := \text{eval}(A, \phi_1, \text{flag}_A)$ ;
                                      $Y_2 := \text{eval}(A, \phi_2, \text{flag}_A) \wedge \text{NZF}(\text{true}, \text{true}, \text{true}, \text{flag}_A)$ ;
                                     return  $\text{rch\_bck}(Y_1, Y_2)$ ;
    case ( $\exists \Box \phi_1$ ):   $W := \text{eval}(A, \phi_1, \text{flag}_A)$ ; return  $\text{NZF}(W, W, \text{true}, \text{flag}_A)$ ;
    case ( $\exists \Box \Diamond \phi_1$ ):  $W := \text{eval}(A, \phi_1, \text{flag}_A)$ ; return  $\text{NZF}(\text{true}, \text{true}, W, \text{flag}_A)$ ;
    case ( $\exists \Diamond \Box \phi_1$ ):  $W := \text{eval}(A, \phi_1, \text{flag}_A)$ ; return  $\text{NZF}(\text{true}, W, \text{true}, \text{flag}_A)$ ;
  }
}

```

The correctness of the algorithm can be established with the following lemma.

Lemma 4. Suppose we have a correct implementation for $\text{NZF}(\eta_0, \eta_1, \eta_2, \text{flag}_A)$. Procedure $\text{eval}(A, \bar{\phi}, \text{flag}_A)$ yields an under-approximation of $\bar{\phi}$ when $\text{flag}_A = -1$; an exact evaluation when $\text{flag}_A = 0$; and an over-approximation of $\bar{\phi}$ when $\text{flag}_A = 1$. ■

Then in exact analysis of model-checking, TA A satisfies $TCTL^\infty$ formula ϕ iff $I \wedge \text{eval}(A, \neg \phi, 0)$ is *false*. In over-approximation, A does not satisfy ϕ if $I \wedge \text{eval}(A, \neg \phi, -1)$ is not *false*. In under-approximation, A satisfies ϕ if $I \wedge \text{eval}(A, \neg \phi, 1)$ is *false*.

7 Formulation for NZF evaluation in the literature

In the following, we discuss paths and cycles of zones. A finite zone path along which all zones satisfy η_1 is called an η_1 -*path*. Infinite computations can be formulated as *non-Zeno cycles* (or strongly connected components) of zones such that the execution times of the cycles are at least 1.

According to [19], a formulation of $NZF(\eta_0, \eta_1, \eta_2)$ evaluation is

$$\text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \text{gfp}F.\exists z.(z = 0 \wedge \eta_2 \wedge \text{rch_bck}(\eta_1, z \geq C_{A:\phi} \wedge F)))) \quad (1)$$

Here **gfp** means the greatest fixpoint. $\text{gfp}F.A(F)$ specifies the greatest fixpoint of $A()$. Clock z is used to check if the cycle time is no less than 1. Formulation (1) involves a double loop and two single loops in implementation.³ The double loop evaluates the (η_1, η_2) -NZF-cycles and is as follows.

$$\text{gfp}F.\exists z.(z = 0 \wedge \eta_2 \wedge \text{rch_bck}(\eta_1, z \geq 1 \wedge F)) \quad (2)$$

The inner loop (i.e., $\text{rch_bck}(\eta_1, z \geq 1 \wedge F)$) of the double loop is for the least fixpoint evaluation of an η_1 -path that starts with a zone satisfying η_2 . The outer loop of the double loop is for the greatest fixpoint evaluation of an NZF-cycle through checking whether the starting and the ending zones of the η_1 -path yielded from the inner cycle coincide. Then after the double loop has been executed, the two outmost invocations of $\text{rch_bck}()$ in (1) incurs two single-loop executions to calculate a predicate that characterizes every zone ζ_0 in figure 1, i.e., the set of states starting an η_0 -path to zone ζ_1 that starts an η_1 -path to an (η_1, η_2) -NZF-cycles.

As reported in [21], the double loop in formulation (1) dominates the complexity and can result in very expensive computations.

8 Successive under-approximation of $NZF()$

In the following, we first present a new formulation for the NZF evaluation based on zone searching and least fixpoint evaluation. Then we propose techniques for zone searching in subsections 8.2 and 8.3. Finally, we integrate the ingredients to present a successive under-approximation algorithm for $NZF()$.

8.1 Another formulation of NZF evaluation

The basic idea of our under-approximate evaluation of $NZF()$ is the following. If somehow we know that a particular zone ζ_1 is in an (η_1, η_2) -NZF-cycle, then we can readily do $\text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \zeta_1))$ to characterize a set of states that satisfy $NZF(\eta_0, \eta_1, \eta_2)$. If we can make a good guess for such ζ_1 , then it is possible that $\text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \zeta_1))$ could turn out to be a big chunk of the exact evaluation of $NZF(\eta_0, \eta_1, \eta_2)$. Then a few such good guesses could give us a very

³ An invocation of $\text{rch_bck}()$ is executed as a loop. An evaluation of the greatest fixpoint also incurs a loop execution.

precise under-approximation of the greatest fixpoint. The idea can be formalized as the following new formulation of $NZF()$ evaluation. For convenience, a zone is called an (η_1, η_2) -NZF-zone if it is in an (η_1, η_2) -NZF-cycle.

Lemma 5. $NZF(\eta_0, \eta_1, \eta_2) \equiv \bigvee_{\zeta \text{ is an } (\eta_1, \eta_2)\text{-NZF-zone}} \text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \zeta)).$ ■

Proof of the lemma can be found in appendix A.

8.2 Fair zones without upper bounds in the cycle

First, we can check those zones characterized by $\eta_1 \wedge \eta_2$. If there are such zones that have no upper bounds on all clock readings, then these zones constitute self-cycle with arbitrary execution times. Such a zone, say ζ , are characterized by the following condition: $\forall x \in X, \zeta(x, 0) = (<, \infty)$. The argument for guessing the existence of such zones is that in many embedded systems, for example the communication protocols, there usually are the idle modes which the systems repeatedly enter after a communication session. In such idle modes, the systems usually wait without time-bounds until some events happen. Thus it is very likely that such idle modes may exist in the system descriptions. Furthermore, we do not have to run the expensive double loop in formulation (1) to check the non-Zenoness of the self-cycle. As we will see in the experiment report, this strategy indeed can alone lead to under-approximation precise enough for the refutation of many benchmarks.

Assume that $\eta_1 \wedge \eta_2 = \bigvee_{1 \leq k \leq n} \zeta_k$, i.e., a disjunction of n zones, the union of all zones without upper bounds on all clocks in $\eta_1 \wedge \eta_2$ can be constructed with the following procedure.

$$\text{get_zones_wo_upperbounds}(\zeta_1 \vee \dots \vee \zeta_n) \equiv \bigvee_{1 \leq k \leq n; \forall x \in X, \zeta_k(x, 0) = (<, \infty)} \zeta_k$$

8.3 Searching for non-Zeno cycles from fair zones

$\text{get_zones_wo_upperbounds}()$ represents an efficient way to find some specific zones in the (η_1, η_2) -NZF-cycles. But it may also happen that the clock readings in the fair zones in an NZF-cycle are upwardly bounded. In this case, we can resort to the strongly connected component algorithm to search for the NZF-cycles. Since the existence of a fair zone (one that satisfies η_2) is a necessary condition for NZF-cycles, we can start the search right from fair zones. The following procedure returns a fair zone in an NZF-cycle along which the cycle time is no less than 1.

```

get_a_zone_w_DFS( $\eta_1, \eta_2$ ) {
  While  $\eta_1 \wedge \eta_2$  is not empty, do {
    Find a zone  $\zeta$  in  $\eta_1 \wedge \eta_2$ ;
    Use depth-first search in  $\eta_1$  to find a path that ..... (3)
    • both starts and ends at  $\zeta$ ; and
    • the path time is no less than 1.
  }
}

```

```

    If the path in statement (3) exists, return  $\zeta$ ; else  $\eta_1 := \eta_1 \wedge \neg\zeta$ ;
  }
  return false;
}

```

8.4 Algorithm for successive under-approximation

The formulation in lemma 5 does not suggest any particular methods to manage the evaluation process. However, if we have a policy to generate zone descriptions $\eta_1, \dots, \eta_n$ one by one in succession, then we can evaluate $NZF(\eta_0, \eta_1, \eta_2)$ with successive under-approximation. In the following, we use lemma 5 and the two guessing techniques in subsections 8.2 and 8.3 to construct an algorithm to embody the idea. In particular, we use the number of enumeration iterations as the *level of approximation* to control the resource consumption and evaluation precision. The higher level of approximation is demanded, the more resources is consumed and the better evaluation precision could be achieved.

```

NZF_successive_uapprox( $\eta_0, \eta_1, \eta_2, level$ ) /*  $level \geq 0$  */ {
   $\eta := \text{rch\_bck}(\eta_0, \text{rch\_bck}(\eta_1, \text{get\_zones\_wo\_upperbounds}(\eta_1 \wedge \eta_2)))$ ;  $\eta_1 := \eta_1 \wedge \neg\eta$ ;
  for ( $l := 1$ ;  $l \leq level$ ;  $l := l + 1$ ) {
     $\zeta := \text{get\_a\_zone\_w\_DFS}(\eta_1, \eta_2)$ ;  $\eta := \eta \vee \text{rch\_bck}(\eta_0, \text{rch\_bck}(\eta_1, \zeta))$ ;  $\eta_1 := \eta_1 \wedge \neg\zeta$ ;
  }
  return  $\eta$ ;
}

```

We choose to use `get_zones_wo_upperbounds()` to generate the starting NZF-zones at level 0 because intuitively, it is in general much less expensive to run `get_zones_wo_upperbounds()` than `get_a_zone_w_DFS()`.

9 speed-up in iterative searches for NZF zones

After each iteration of procedure `NZF_successive_uapprox()` in subsection 8.4, we remove an NZF-zone from the search space to avoid redundant searching. This removal takes place at the end of lines 2 and 4 in the procedure. It is possible to prune the search space in bigger chunks. Specifically, two NZF-zones that belong to the same NZF-cycle may be used in two iterations to start the search in `NZF_successive_uapprox()`. Suppose the two zones are ζ, ζ' used in this order. Then $\zeta' \subseteq \text{rch_bck}(\eta_1, \zeta)$ and $\zeta \subseteq \text{rch_bck}(\eta_1, \zeta')$. Thus there is no need to make a new round of depth-first search from ζ' . In fact, we can establish the following lemma which can give us a sufficient condition leading to the significant pruning of the iterative search spaces.

Lemma 6. *Given three zones ζ_0, ζ_1 , and ζ_2 such that ζ_1 and ζ_2 are in the same (η_1, η_2) -NZF-cycle, if $\zeta_1 \subseteq \text{rch_bck}(\eta_1, \zeta_0)$, then $\zeta_2 \subseteq \text{rch_bck}(\eta_1, \zeta_0)$. ■*

Proof of the lemma can be found in appendix B. Lemma 6 implies that we do not have to search through any states in $\text{rch_bck}(\eta_1, \zeta_0)$ after the iteration with ζ_0 as the search start. This leads to the following revision of procedure $\text{NZF_successive_uapprox}()$.

```

NZF_successive_uapprox_big_chunks( $\eta_0, \eta_1, \eta_2, level$ ) /*  $level \geq 0$  */ {
   $\eta := \text{rch\_bck}(\eta_1, \text{get\_zones\_wo\_upperbounds}(\eta_1 \wedge \eta_2)); \eta_1 := \eta_1 - \eta;$ 
   $\eta := \text{rch\_bck}(\eta_0, \eta);$ 
  for ( $l := 1; l \leq level; l := l + 1$ ) {
     $\zeta := \text{rch\_bck}(\eta_1, \text{get\_a\_zone\_w\_DFS}(\eta_1, \eta_2)); \eta_1 := \eta_1 - \zeta;$ 
     $\eta := \eta \vee \text{rch\_bck}(\eta_0, \zeta);$ 
  }
  return  $\eta;$ 
}

```

10 Implementation and experiment

We have implemented the ideas in our model-checker/simulator, **RED** version 5.4, for communicating timed automatas [13]. **RED** uses the new BDD-like data-structure, *CRD* (Clock-Restriction Diagram) [16–18], and supports both forward and backward analyses, full *TCTL* model-checking with event constraints and multiple fairness assumptions [19], deadlock detection, and counter-example generation. We here report our experiments with the following seven parameterized benchmarks. The details of the benchmarks and their running options can be found in appendix C. The experiment result is shown in table 1. For each of the benchmarks, we have collected data with exact analysis and under-approximation in greatest fixpoint evaluation with or without the speed-up technique. For each run, we report the CPU time (for model-checking only), memory size, and the level of under-approximation needed for the verification. For all the benchmarks, our under-approximation techniques show significant enhancement over the exact analysis. For example, for benchmark (F), the performance can be a thousand times better.

Also the experiment outcome shows a good promise that our under-approximation formulation may be able to quickly refute specifications and prove vacuity. Most of the benchmarks can be verified with under-approximation of level zero or one.

11 Conclusion

We investigate how to use under-approximation to fast refute incorrect inevitabilities and to check vacuous satisfaction in dense-time models. Experiment results showed that our techniques had significantly enhanced the performance of our model-checker against several benchmarks. In the future, we feel that such techniques could be useful in industrial projects.

benchmarks	concurrency	exact (time/space)	under-approximation (time/space/level)	
			no speed-up	speed-up
(A) Fischer's bounded waiting	2 proc's	0.17s/30k	0.03s/15k/0	0.02s/15k/0
	3 proc's	2.68s/146k	0.34s/73k/0	0.32s/73k/0
	4 proc's	28.5s/580k	2.27s/324k/0	2.24s/324k/0
	5 proc's	275.1s/2656k	14.71s/1335k/0	14.84s/1335k/0
(B) Fischer's progress w. a bug	2 proc's	0.12s/21k	0.04s/16k/1	0.04s/16k/1
	3 proc's	1.93s/85k	0.36s/60k/1	0.34s/60k/1
	4 proc's	21.98s/354k	2.75s/225k/1	2.83s/225k/1
	5 proc's	215.0s/1543k	22.46s/873k/1	22.27s/873k/1
(C) CSMA/CD bounded waiting	2 senders	2.77s/116k	0.48s/74k/2	0.44s/73k/1
	3 senders	78.97s/942k	4.58s/150k/5	3.12s/129k/1
	4 senders	1560s/4536k	31.10s/366k/2	27.89s/292k/1
	5 senders	> 8600s	473.1s/1013k/2	214.9s/838k/1
(D) CSMA/CD progress of retrials w. a bug	2 senders	0.32s/34k	0.12s/34k/0	0.11s/34k/0
	3 senders	4.47s/98k	1.61s/69k/0	1.47s/69k/0
	4 senders	33.28s/316k	11.96s/186k/0	11.99s/186k/0
	5 senders	220.9s/884k	80.47s/596k/0	77.77s/596k/0
(E) FDDI token ring vacuity	2 stations	2.88s/305k	0.04s/42k/1	0.06s/42k/1
	3 stations	152.15s/3108k	0.29s/119k/1	0.30s/119k/1
	4 stations	> 1200s	2.15s/617k/1	2.27s/618k/1
	5 stations	> 1200s	70.78s/9574k/1	71.10s/9571k/1
(F) PATHOS scheduling inevitable fairness	2 proc's	0.01s/10k	≈ 0s/10k/0	≈ 0s/10k/0
	3 proc's	0.22s/58k	0.03s/24k/0	0.04s/24k/0
	4 proc's	10.72s/1181k	0.13s/61k/0	0.15s/61k/0
	5 proc's	1280s/39076k	0.60s/192k/0	0.61s/192k/0
	6 proc's	N/A	2.17s/601k/0	2.10s/601k/0
	7 proc's	N/A	6.44s/1813k/0	6.51s/1813k/0
	8 proc's	N/A	20.19s/5253k/0	20.17s/5253k/0
	9 proc's	N/A	62.02s/14632k/0	66.30s/14632k/0
(G) Bluetooth	9 procs	228.9s/1886k	35.98s/1280k/0	36.36s/1280k/0
(H) L2CAP	9 procs	233.4s/1887k	40.76s/1280k/0	41.21s/1280k/0
(I)	9 procs	262.0s/1913k	29.77s/1435k/0	29.71s/1435k/0
(J)	9 procs	467.8s/2235k	57.91s/1317k/0	56.93s/1317k/0
(K)	9 procs	480.7s/2135k	67.66s/1332k/0	71.56s/1332k/0
(L)	9 procs	476.2s/2136k	51.59s/1437k/0	52.97s/1437k/0
(M)	9 procs	250.0s/1887k	52.34s/1280k/0	52.89s/1280k/0
(N)	9 procs	251.9s/1888k	60.12s/1281k/0	55.19s/1281k/0
(O)	9 procs	280.6s/1913k	44.59s/1434k/0	44.98s/1434k/0

data collected on a Pentium 4 Mobile 1.6GHz with 256MB memory running LINUX;
s: seconds; k: kilobytes of memory in data-structure; N/A: not available;

Table 1. Performance data of model-checking algorithms

References

1. Asarin, Bozga, Kerbrat, Maler, Pnueli, Rasse. Data-Structures for the Verification of Timed Automata. Proceedings, HART'97, LNCS 1201.
2. R. Alur, C. Courcoubetis, D.L. Dill. Model Checking for Real-Time Systems, IEEE LICS, 1990.
3. R. Alur, D.L. Dill. Automata for modelling real-time systems. ICALP' 1990, LNCS 443, Springer-Verlag, pp.322-335.
4. I. Beer, S. Ben-David, C. Eisner, Y. Rodeh. Efficient detection of vacuity in ACTL formulas. CAV'97, LNCS 1254, Springer-Verlag.
5. G. Behrmann, K.G. Larsen, J. Pearson, C. Weise, Wang Yi. Efficient Timed Reachability Analysis Using Clock Difference Diagrams. CAV'99, July, Trento, Italy, LNCS 1633, Springer-Verlag.

6. D.L. Dill. Timing Assumptions and Verification of Finite-state Concurrent Systems. CAV'89, LNCS 407, Springer-Verlag.
7. J.B. Fourier. (reported in:) Analyse des travaux de l'Académie Royale des Sciences pendant l'année 1824, Partie Mathématique, 1827.
8. T.A. Henzinger, X. Nicollin, J. Sifakis, S. Yovine. Symbolic Model Checking for Real-Time Systems, IEEE LICS 1992.
9. O. Kupferman, M.Y. Vardi. Vacuity detection in temporal model checking. 10 IFIP WG 10.5 CHARME, September 1999, LNCS 1703, Springer-Verlag.
10. J. Moller, J. Lichtenberg, H.R. Andersen, H. Hulgaard. Difference Decision Diagrams, in proceedings of Annual Conference of the European Association for Computer Science Logic (CSL), Sept. 1999, Madreid, Spain.
11. J. Moller, J. Lichtenberg, H.R. Andersen, H. Hulgaard. Fully Symbolic Model-Checking of Timed Systems using Difference Decision Diagrams, in proceedings of Workshop on Symbolic Model-Checking (SMC), July 1999, Trento, Italy.
12. M.O. Moller. Parking Can Get You There Faster - Model Augmentation to Speed up Real-Time Model Checking. Electronic Notes in Theoretical Computer Science 65(6), 2002.
13. A. Shaw. Communicating Real-Time State Machines. IEEE Transactions on Software Engineering 18(9), September, 1992.
14. F. Wang. Efficient Data-Structure for Fully Symbolic Verification of Real-Time Software Systems. TACAS'2000, LNCS 1785, Springer-Verlag.
15. F. Wang. Region Encoding Diagram for Fully Symbolic Verification of Real-Time Systems. the 24th COMPSAC, Oct. 2000, Taipei, Taiwan, ROC, IEEE press.
16. F. Wang. RED: Model-checker for Timed Automata with Clock-Restriction Diagram. Workshop on Real-Time Tools, Aug. 2001, Technical Report 2001-014, ISSN 1404-3203, Dept. of Information Technology, Uppsala University.
17. F. Wang. Symbolic Verification of Complex Real-Time Systems with Clock-Restriction Diagram, Proceedings of FORTE, August 2001, Cheju Island, Korea.
18. F. Wang. Efficient Verification of Timed Automata with BDD-like Data-Structures, to appear in special issue of STTT (Software Tools for Technology Transfer, Springer-Verlag) for VMCAI'2003, LNCS 2575, Springer-Verlag.
19. F. Wang. Model-Checking Distributed Real-Time Systems with States, Events, and Multiple Fairness Assumptions. 10th AMAST, LNCS, Springer-Verlag.
20. F. Wang, P.-A. Hsiung. Efficient and User-Friendly Verification. IEEE Transactions on Computers, Jan. 2002.
21. F. Wang, G.-D. Huang, F. Yu. TCTL Inevitability Analysis of Dense-Time Systems. 8th CIAA (Conference on Implementation and Application of Automata), July 2003, Santa Barbara, CA, USA; LNCS 2759, Springer-Verlag.
22. H. Wong-Toi. Symbolic Approximations for Verifying Real-Time Systems. Ph.D. thesis, Stanford University, 1995.

APPENDIX

A Proof for lemma 5

We first assume that there is a state $\nu \models NZF(\eta_0, \eta_1, \eta_2)$. This means that there are two states ν_1 and ν_2 in a run such that (1) ν_1 and ν_2 belong to the same zone; (2) ν_1 and ν_2 both satisfy η_2 ; (3) zones along the run segment from ν_1 to ν_2 all satisfy η_1 ; (4) time-passage of the run segment is no less than 1; and (5) the run segment from ν to ν_1 is concatenated from two run segments such that the states in the first and the second segments respectively satisfy η_0 and η_1 . Then the finite run segment from ν_1 to ν_2 can be projected to an (η_1, η_2) -NZF-cycle. Thus the zone of ν_1 , say ζ' , is an (η_1, η_2) -NZF-zone. Then condition (5) in the above implies that there is an η_0 -path concatenated with an η_1 -path from the zone of ν to ζ' . Thus we know that $\nu \models \text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \zeta'))$.

Now we assume that there is a state $\nu \models \text{rch_bck}(\eta_0, \text{rch_bck}(\eta_1, \zeta'))$ for a particular (η_1, η_2) -NZF-zone ζ' . This means that there is an η_0 -path from the zone of ν to another ζ_1 which in turn starts an η_1 -path to the (η_1, η_2) -NZF-cycle which ζ' belongs to. These η_0 -path, η_1 -path, and the (η_1, η_2) -NZF-cycle together can be unrolled to an infinite zone path along which η_0 is true until η_1 becomes true forever and η_2 is true infinitely often. Since this unrolled infinite zone path is constructed in a backward analysis and ν is in the zone starting the path, we deduce that ν also starts a run that satisfies η_0 until η_1 is true forever and η_2 is true infinitely often. This means $\nu \models NZF(\eta_0, \eta_1, \eta_2)$.

B Proof for lemma 6

We need to prove that there is an η_1 -path P from ζ_2 to ζ_0 . Since $\zeta_1 \subseteq \text{rch_bck}(\eta_1, \zeta_0)$, there is an η_1 -path P_1 from ζ_1 to ζ_0 . Since ζ_1 and ζ_2 are in the same (η_1, η_2) -NZF-cycle, there is also an η_1 -path P_2 from ζ_2 to ζ_1 . Thus an example of P is the concatenation of P_2 and P_1 .

C Experiment and benchmarks

Our tool **RED** can be downloaded for free at <http://cc.ee.ntu.edu.tw/~val>. To run the tool, simply type “**red** [-options] <inputfilename> <outputfilename>” in LINUX. To invoke the under-approximation, please use option ‘-Au’; and over-approximation, please use option ‘-Ao.’

To enforce the non-Zeno requirement on computations, please use option ‘-Z.’

To invoke greatest under-approximation of level d, please use option ‘Gd.’ Note that if this option is invoked while the subformula is to be evaluated with over-approximation, then exact analysis will instead be carried out.

To invoke the speed-up technique, please use option ‘Gc.’

While we describe the following benchmarks, we shall also list the options used.

- (A) *Bounded waiting of Fischer’s mutual exclusion algorithm.* The algorithm uses a global pointer variable and a local clock of each process to guarantee the mutual exclusion to the critical section. The algorithm does not guarantee that a process in the **ready** state will eventually enter the critical section. We want to refute the following specification $\forall \Box(\text{ready}_1 \rightarrow \forall \Diamond \text{critical}_1)$ that is not true of the algorithm. Here **ready_i** and **critical_i** are the propositions respectively marking that process *i* is in the **ready** and the **critical** states.

The input file names are like **hfitb.d** where *i* is the number processes. For exact analysis, we use option ‘-Z.’ For under-approximation, we use options ‘-AoGd0’ (without the speed-up technique) and ‘-AoGcGd0’ (with the speed-up technique).

- (B) *Progress of Fischer’s algorithm with a bug.* We inserted a bug in the Fischer’s mutual exclusion algorithm so that processes may prevent each other from the critical section. We want to refute the following property

$$\forall \Box(\text{ready}_1 \rightarrow \forall \Diamond \exists i, \text{critical}_i)$$

saying that if a process wants to enter the critical section, then eventually some process will be in the critical section. The bug invalidates the property. The input file names are like **hfierr.d** where *i* is the number processes. For exact analysis, we use option ‘-Z.’ For under-approximation, we use options ‘-AoGd1’ (without the speed-up technique) and ‘-AoGcGd1’ (with the speed-up technique).

- (C) *Bounded waiting of CSMA/CD mutual exclusion algorithm.* CSMA/CD assumes that all senders share the same bus. Each of them can send a message to the bus when it finds no signals in the bus. But if in 52μs it finds its message has been corrupted, then it has to stop sending the message and retry later. We want to refute the following bounded waiting property

$$\forall \Box(\text{transm}_1 \rightarrow \forall \Diamond(\text{transm}_1 \wedge x_1 \geq 52))$$

that is not guaranteed in CSMA/CD. Here proposition **transm_i** means that process *i* is sending out a message and *x_i* is the local clock of process *i*.

The input file names are like **hcdiaf.d** where *i* is the number processes. For exact analysis, we use option ‘-Z.’ For under-approximation without speed-up, we use options ‘-AoGd2’ for all files except **hcd3af.d** and ‘AoGd5’ for **hcd3af.d**. With speed-up, we use ‘-AoGcGd1.’

- (D) *Progress of retrials of CSMA/CD mutual exclusion algorithm with a bug.* In the CSMA/CD model, processes will try to resend the messages until they succeed in sending out the messages. We inserted a bug to the algorithm so that some processes may be trapped in an error mode with no outgoing transitions. We want to refute the property $\forall \Box(\text{retry}_1 \rightarrow \forall \Diamond \exists i, \text{transm}_i)$ that is not guaranteed in CSMA/CD with this bug. Here **retry_i** means that process *i* is waiting for resending its message.

The input file names are like **hcdierr2.d** where *i* is the number processes. For exact analysis, we use option ‘-Z.’ For under-approximation, we use

options ‘-AoGd0 (without the speed-up technique) and ‘-AoGcGd0’ (with the speed-up technique).

- (E) *Vacuity of a strong fairness assumption in FDDI token ring protocol.* We want to check whether there is a run along which a station enters the asynchronous transmission mode infinitely many times. That is $\exists \Box \Diamond \text{async}_1$.

The input file names are like `hddiiae.d` where i is the number processes. For exact analysis, we use option ‘-Z.’ For under-approximation, we use options ‘-AuGd1 (without the speed-up technique) and ‘-AuGcGd1’ (with the speed-up technique).

- (F) *Strong fairness for the lowest priority in PATHOS real-time operating system scheduling policy.* PATHOS is a real-time operating system that uses priority scheduling policy. In a system of n processes, the model assumes that in each period of n time units, each process will need at most 1 time units to run on the CPU. We want to refute the specification that the lowest-priority process gets to run on the CPU infinitely often along any computation. That is, $\forall \Box \Diamond \text{run}_n$.

The input file names are like `pathosiaao.d` where i is the number processes. For exact analysis, we use option ‘-Z.’ For under-approximation, we use options ‘-AoGd0 (without the speed-up technique) and ‘-AoGcGd0’ (with the speed-up technique).

- (G-O) *Various properties of Bluetooth L2CAP.* We have also checked 9 properties against Bluetooth L2CAP [1]. The L2CAP model is refined from the one in [1]. There are 9 processes to model the users, L2CAP layers, timers, and the medium in the two sides of the communications. We checked the model against the following the following 9 properties. For convenience, we use ‘ (α) ,’ ‘ (β) ,’ and ‘ (γ) ’ to represent the following properties respectively: (α) : the master L2CAP is in state ‘W4_L2CAP_CONNECT_RSP; (β) : the master L2CAP is in state ‘W4_L2CA_CONNECT_RSP; and (γ) : the master L2CAP is in state ‘OPEN.’ The nine properties and their input file names are labeled as follows:

Labels	properties	input file name
(G)	$\forall \Box ((\alpha) \rightarrow \forall \Diamond (\gamma))$	<code>l2nae.d</code>
(H)	$\forall \Box ((\alpha) \rightarrow \forall \Diamond^\infty (\gamma))$	<code>l2nao.d</code>
(I)	$\forall \Box ((\alpha) \rightarrow \forall \Box (\gamma))$	<code>l2nag.d</code>
(J)	$\forall \Box ((\alpha) \rightarrow \forall \Diamond ((\beta) \wedge \forall \Diamond (\gamma)))$	<code>l2naeae.d</code>
(K)	$\forall \Box ((\alpha) \rightarrow \forall \Diamond ((\beta) \wedge \forall \Diamond^\infty (\gamma)))$	<code>l2naeao.d</code>
(L)	$\forall \Box ((\alpha) \rightarrow \forall \Diamond ((\beta) \wedge \forall \Box (\gamma)))$	<code>l2naeag.d</code>
(M)	$\forall \Box ((\alpha) \rightarrow \forall \Box ((\beta) \rightarrow \forall \Diamond (\gamma)))$	<code>l2nagae.d</code>
(N)	$\forall \Box ((\alpha) \rightarrow \forall \Box ((\beta) \rightarrow \forall \Diamond^\infty (\gamma)))$	<code>l2nagao.d</code>
(O)	$\forall \Box ((\alpha) \rightarrow \forall \Box ((\beta) \rightarrow \forall \Box (\gamma)))$	<code>l2nagag.d</code>

For exact analysis, we use option ‘-Z.’ For under-approximation, we use options ‘-AoGd0 (without the speed-up technique) and ‘-AoGcGd0’ (with the speed-up technique).